



www.GetGreenLighting.com
Induction Lighting Provider
(614) 556-7118

G G L - W P - 2 0 1

Large Shallow Induction Wall Pack Fixture



Housing:

- ✓ Die cast aluminum housing & hinged front frame
- ✓ 1/2" coin plugs with O-rings for conduit & photocell
- ✓ Textured architectural bronze powdercoat finish over a chromate conversion coating

Lens:

- ✓ Molded prismatic borosilicate glass lens

Reflector:

- ✓ Aluminum reflector

Mounting:

- ✓ Cast-in template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit


Wattage:

- ✓ 40, 80 or 100w 5000K

Listing & Ratings:

- ✓ CSA Listed for wet locations.

Custom colors available upon request.

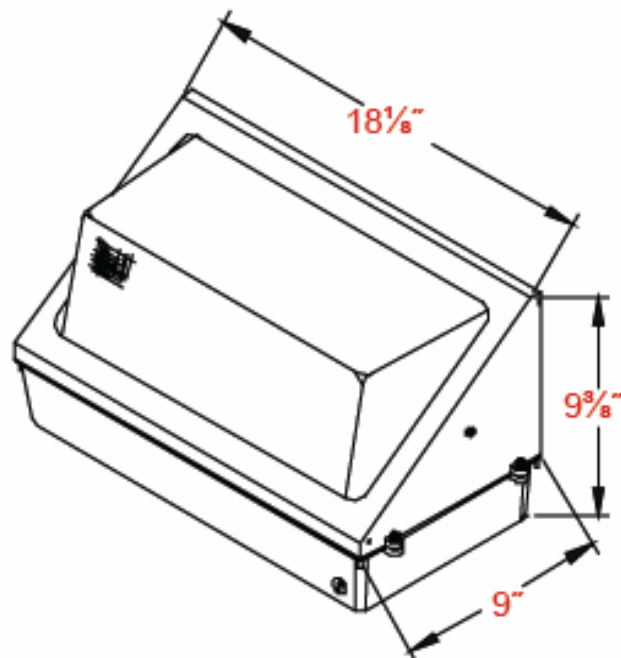



www.GetGreenLighting.com
 Induction Lighting Provider
 (614) 556-7118

G G L - W P - 2 0 1

Large Shallow Induction Wall Pack Fixture

Catalog Number	Wattage	Voltage	Lamp	Ballast
GGL-WP-201-40-1205K	40	120	Induction	Electronic
GGL-WP-201-40-2405K	40	240	Induction	Electronic
GGL-WP-201-40-2775K	40	277	Induction	Electronic
GGL-WP-201-80-1205K	80	120	Induction	Electronic
GGL-WP-201-80-2405K	80	240	Induction	Electronic
GGL-WP-201-80-2775K	80	277	Induction	Electronic
GGL-WP-201-100-1205K	100	120	Induction	Electronic
GGL-WP-201-100-2405K	100	240	Induction	Electronic
GGL-WP-201-100-2775K	100	277	Induction	Electronic

*Specify Color: **GP**=Graphite, **BK**=Black, **WH**=White, **GR**=Gray **BZ**=Bronze



WP25GL

Mounting Options	
Catalog Number	Description
WP25GL	Molded prismatic borosilicate glass lens with gasket
WP25FCS	Full cutoff, stamped steel, textured bronze finish
WP25FCA	Full cutoff, stamped aluminum, textured bronze finish
WP25SCA	Side cutoff, stamped aluminum textured bronze finish
WP25LG	Clear polycarbonate vandal resistant guard
WP25WG	Wire guard, stainless steel construction



WP25FCS
(Shown Mounted)



WP25SCS
(Shown Mounted)





WP25LG
(Shown Mounted)



G G L - W P - 2 0 1

Large Shallow Induction Wall Pack Fixture

Photometric Data 40w:

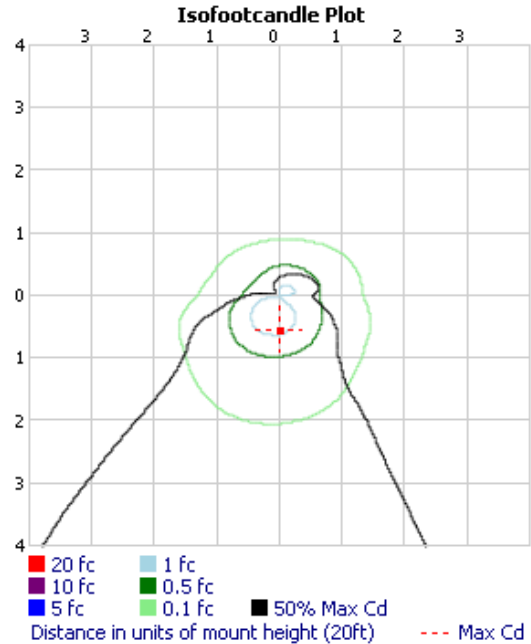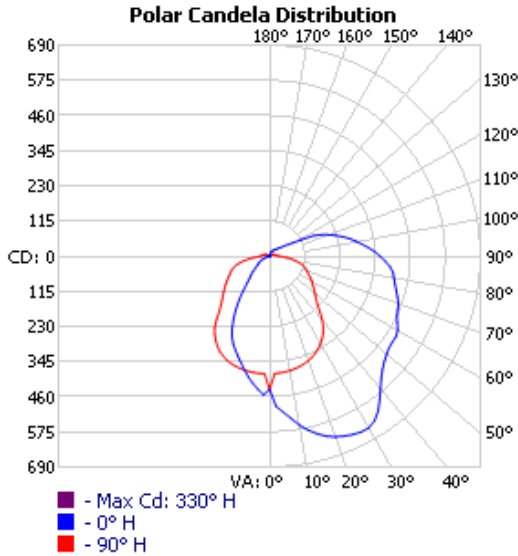

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	363.4	13%	20%
0-40	598.2	21.4%	32.9%
0-60	1,038.1	37.1%	57.2%
60-90	512.7	18.3%	28.2%
70-100	421.8	15.1%	23.2%
90-120	223.4	8%	12.3%
0-90	1,550.8	55.4%	85.4%
90-180	264.9	9.5%	14.6%
0-180	1,815.7	64.8%	100%

LUMENS PER ZONE

ZONE	LUMENS	% TOTAL	ZONE	LUMENS	% TOTAL
0-10	42.0	2.3%	90-100	106.0	5.8%
10-20	124.7	6.9%	100-110	73.9	4.1%
20-30	196.7	10.8%	110-120	43.6	2.4%
30-40	234.8	12.9%	120-130	20.7	1.1%
40-50	227.5	12.5%	130-140	10.8	0.6%
50-60	212.4	11.7%	140-150	6.0	0.3%
60-70	196.9	10.8%	150-160	3.0	0.2%
70-80	173.5	9.6%	160-170	0.8	0%
80-90	142.2	7.8%	170-180	0.2	0%

ROADWAY SUMMARY

CUTOFF CLASSIFICATION:	NONCUTOFF	
DISTRIBUTION:	TYPE IV, VERY SHORT	
MAX CD, 90 DEG VERT:	361.9	
MAX CD, 80 TO <90 DEG:	416.4	
	LUMENS	% LAMP
DOWNWARD STREET SIDE:	1,182.5	42.2%
DOWNWARD HOUSE SIDE:	368.4	13.2%
DOWNWARD TOTAL:	1,550.8	55.4%
UPWARD STREET SIDE:	249.3	8.9%
UPWARD HOUSE SIDE:	15.5	0.6%
UPWARD TOTAL:	264.9	9.5%
TOTAL LUMENS:	1,815.7	64.8%

LCS TABLE



BUG RATING	B1 - U3 - G2	
FORWARD LIGHT	LUMENS	%
LOW(0-30):	219.7	7.8%
MEDIUM(30-60):	505.5	18.1%
HIGH(60-80):	323.2	11.5%
VERY HIGH(80-90):	134.1	4.8%
BACK LIGHT		
LOW(0-30):	143.7	5.1%
MEDIUM(30-60):	169.3	6%
HIGH(60-80):	47.3	1.7%
VERY HIGH(80-90):	8.1	0.3%
UPLIGHT		
LOW(90-100):	106.0	3.8%
HIGH(100-180):	158.9	5.7%
TRAPPED LIGHT:	984.3	35.2%



G G L - W P - 2 0 1

Large Shallow Induction Wall Pack Fixture

Photometric Data 80w:

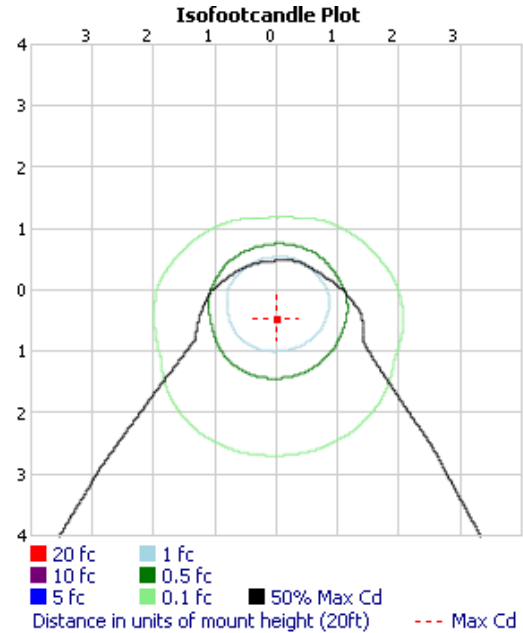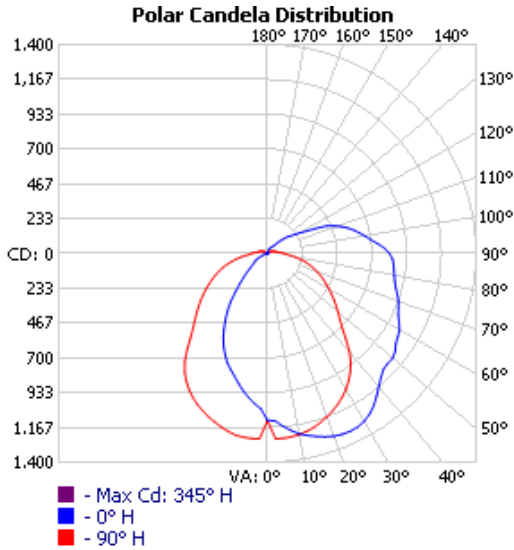

ZONAL LUMEN SUMMARY			
ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	886.6	13.9%	20.7%
0-40	1,439.5	22.5%	33.5%
0-60	2,471.7	38.6%	57.6%
60-90	1,137.4	17.8%	26.5%
70-100	949.3	14.8%	22.1%
90-120	569.3	8.9%	13.3%
0-90	3,609.1	56.4%	84.1%
90-180	682.8	10.7%	15.9%
0-180	4,292.0	67.1%	100%

LUMENS PER ZONE					
ZONE	LUMENS	% TOTAL	ZONE	LUMENS	% TOTAL
0-10	106.8	2.5%	90-100	256.1	6%
10-20	309.2	7.2%	100-110	190.2	4.4%
20-30	470.7	11.0%	110-120	123.0	2.9%
30-40	552.9	12.9%	120-130	64.9	1.5%
40-50	537.2	12.5%	130-140	29.6	0.7%
50-60	495.0	11.5%	140-150	12.3	0.3%
60-70	444.2	10.3%	150-160	5.4	0.1%
70-80	376.6	8.8%	160-170	1.2	0%
80-90	316.7	7.4%	170-180	0.2	0%

ROADWAY SUMMARY			
CUTOFF CLASSIFICATION:	NONCUTOFF		
DISTRIBUTION:	TYPE IV, VERY SHORT		
MAX CD, 90 DEG VERT:	819.1		
MAX CD, 80 TO <90 DEG:	864.3		
	LUMENS	% LAMP	
DOWNWARD STREET SIDE:	2,626.6	41%	
DOWNWARD HOUSE SIDE:	982.8	15.4%	
DOWNWARD TOTAL:	3,609.3	56.4%	
UPWARD STREET SIDE:	651.9	10.2%	
UPWARD HOUSE SIDE:	30.8	0.5%	
UPWARD TOTAL:	682.7	10.7%	
TOTAL LUMENS:	4,292.0	67.1%	



LCS TABLE		
BUG RATING	B1 - U3 - G3	
FORWARD LIGHT	LUMENS	LUMENS %
LOW(0-30):	514.7	8%
MEDIUM(30-60):	1,116.7	17.4%
HIGH(60-80):	698.3	10.9%
VERY HIGH(80-90):	296.8	4.6%
BACK LIGHT		
LOW(0-30):	372.1	5.8%
MEDIUM(30-60):	468.5	7.3%
HIGH(60-80):	122.4	1.9%
VERY HIGH(80-90):	19.8	0.3%
UPLIGHT		
LOW(90-100):	256.1	4%
HIGH(100-180):	426.6	6.7%
TRAPPED LIGHT:	2,108.0	32.9%



G G L - W P - 2 0 1

Large Shallow Induction Wall Pack Fixture

Photometric Data 100w:

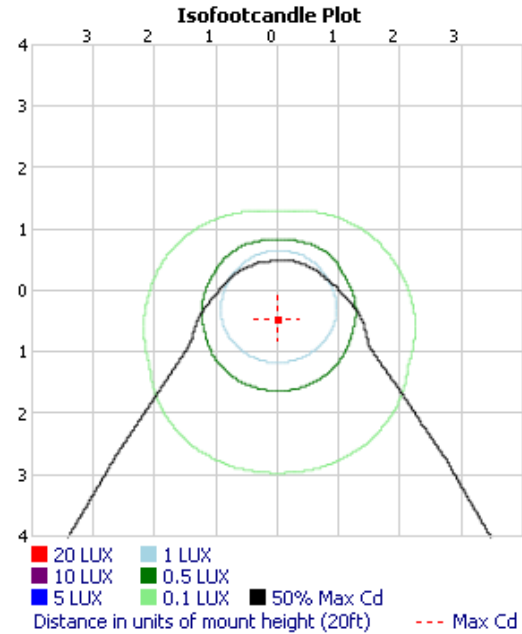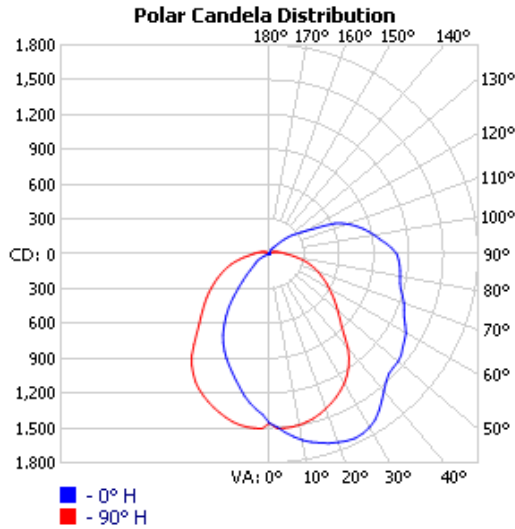

ZONAL LUMEN SUMMARY			
ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	1,155.7	14.4%	20.3%
0-40	1,882.3	23.5%	33%
0-60	3,251.3	40.6%	57.1%
60-90	1,505.1	18.8%	26.4%
70-100	1,262.7	15.8%	22.2%
90-120	781.6	9.8%	13.7%
0-90	4,756.3	59.5%	83.5%
90-180	939.5	11.7%	16.5%
0-180	5,695.8	71.2%	100%

LUMENS PER ZONE					
ZONE	LUMENS	% TOTAL	ZONE	LUMENS	% TOTAL
0-10	139.3	2.4%	90-100	347.2	6.1%
10-20	402.8	7.1%	100-110	262.2	4.6%
20-30	613.7	10.8%	110-120	172.1	3%
30-40	726.5	12.8%	120-130	91.5	1.6%
40-50	710.6	12.5%	130-140	41.4	0.7%
50-60	658.4	11.6%	140-150	16.4	0.3%
60-70	589.6	10.4%	150-160	6.9	0.1%
70-80	495.8	8.7%	160-170	1.4	0%
80-90	419.6	7.4%	170-180	0.2	0%

ROADWAY SUMMARY			
CUTOFF CLASSIFICATION:	NONCUTOFF		
DISTRIBUTION:	TYPE IV, VERY SHORT		
MAX CD, 90 DEG VERT:	1,098.4		
MAX CD, 80 TO <90 DEG:	1,144.3		
	LUMENS	% LAMP	
DOWNWARD STREET SIDE:	3,458.4	43.2%	
DOWNWARD HOUSE SIDE:	1,298.1	16.2%	
DOWNWARD TOTAL:	4,756.6	59.5%	
UPWARD STREET SIDE:	899.8	11.2%	
UPWARD HOUSE SIDE:	39.5	0.5%	
UPWARD TOTAL:	939.3	11.7%	
TOTAL LUMENS:	5,695.9	71.2%	

LCS TABLE		
BUG RATING	B1 - U4 - G3	
FORWARD LIGHT	LUMENS	LUMENS %
LOW(0-30):	673.4	8.4%
MEDIUM(30-60):	1,472.0	18.4%
HIGH(60-80):	920.3	11.5%
VERY HIGH(80-90):	392.6	4.9%
BACK LIGHT		
LOW(0-30):	482.4	6%
MEDIUM(30-60):	623.7	7.8%
HIGH(60-80):	165.1	2.1%
VERY HIGH(80-90):	26.9	0.3%
UPLIGHT		
LOW(90-100):	347.2	4.3%
HIGH(100-180):	592.1	7.4%
TRAPPED LIGHT:	2,304.1	28.8%