



[www.GetGreenLighting.com](http://www.GetGreenLighting.com)  
 Induction Lighting Provider  
 (614) 556-7118

# GGL-120ALA-18A

## Aluminum Induction High Bay.



**Features:**

- ✓ Die cast housing with power painting.
- ✓ High purity aluminum reflector with vacuum coated inner surface.
- ✓ Assembled with 120W Induction lamp
- ✓ Optional flat tempered glass, polycarbonate lens.




**Applications:**

Retail stores, warehouses, shopping malls.

**Lamp and Ballast:**

- Round tubular induction lamp features high lighting efficacy, long life, excellent color rendering index (CRI) and stable output.
- Electronic ballast features high power factor (>0.95).

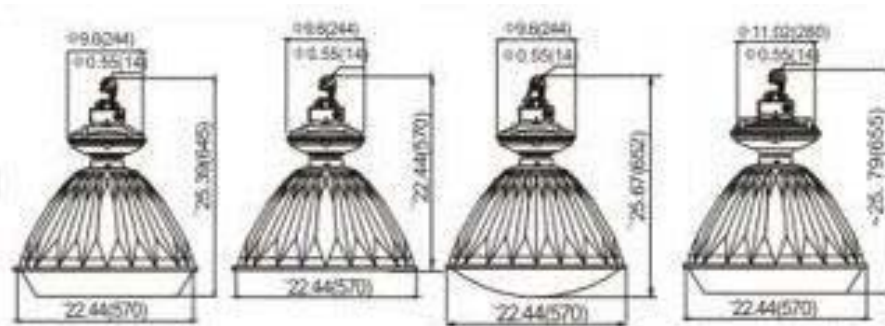

Fixture Specifications										
#	Fixture Model #	Lamp	Wattage	Voltage	Kelvin	Ambient T. (C)	Install	IP Class	Note	UL
1	GGL-120ALA-18A	RD120	120W	120-277V	5,000	-20- +40	Hanging conduit/ hook suspended.	IP43 (ballast compartment)	22" AL Hood Optional lens, tempered glass, acrylic PC	X
2	GGL-150ALA-18A	RD150	150W							
3	GGL-200ALA-18A	RD200	200W							
4	GGL-250ALA-18A	RD250	250W						22" AL hood, acrylic lens	

\*Color temperature 2,720-6,500 available upon request