




www.GetGreenLighting.com
 Induction Lighting Provider
 (614) 556-7118

GGL-70MX2A

Garage Canopy Induction Fixture.



Features:

- ✓ Die cast housing with powder painting.
- ✓ High purity aluminum reflector, high reflecting ratio, high efficiency.
- ✓ UV stabilized polycarbonate lens.
- ✓ Assembled with 70W round induction lamp.
- ✓ Heat resistant silicone rubber sealant ring to ensure a water tight seal.

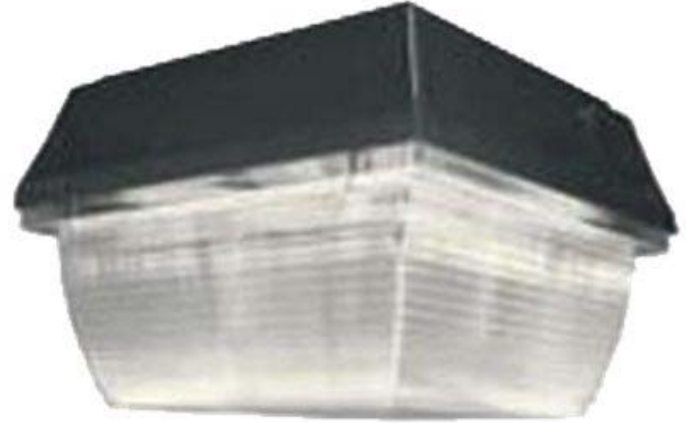

Lamp and Ballast:

- Rectangular induction lamp features high lighting efficacy, long life, excellent color rendering index (CRI) and stable output.
- Electronic ballast features high power factor (>0.95).

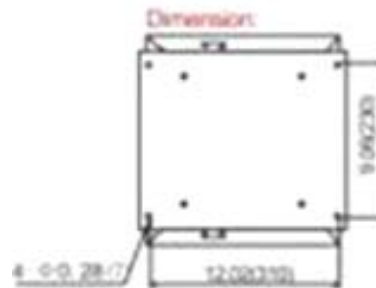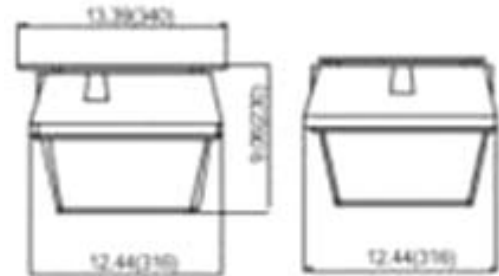

Fixture Specifications									
#	Fixture Model #	Lamp	Wattage	Voltage	Kelvin	Ambient T. (C)	Mounting	Note	UL
1	GGL-70MX2A	RD70	70	120-277V	5,000	-20- +40	Surface	Round style lamp, PC lens	X

*Color temperature 2,720-6,500 available upon request



GGL-70MX2A Garage Canopy Induction Fixture.

GGL-MX2A Luminaire Photometric Report.

Technical Data:

Input voltage:	120-277V 50/60Hz.
Long life:	Average lifetime of 100,000 hours.
High lighting efficiency:	65-90 lm/w
High color rendering index:	Above 80 RI.
Quick start:	Instant start and re-strike.
High power factor:	0.95.
High frequency operation:	No flickering, eyesight friendly.
Low Lamp Lumen Depreciation:	Luminance maintenance rate 70% at 60,000 hours.
Constant wattage output:	The lamps output varies less than 3% with the input fluctuation up to $\pm 10\%$.
Strong adaptability:	Operating ambient temperature -20°C to $+50^{\circ}\text{C}$ with enclosed fixture, lamp for -40° available.
Low harmonic distortion:	THD < 10% meets international standard level L.
Dimming function:	Optional intelligent dimming controller.

