



www.GetGreenLighting.com
 Induction Lighting Provider
 (614) 556-7118

GGL-80PC-18

PC Induction High Bay.

Features:


- ✓ Die cast housing with power painting.
- ✓ PC + UV reflector.
- ✓ Assembled with 80W Induction lamp

Applications:

Retail stores, warehouses, shopping malls.

Lamp and Ballast:

- Round tubular induction lamp features high lighting efficacy, long life, excellent color rendering index (CRI) and stable output.
- Electronic ballast features high power factor (>0.95).

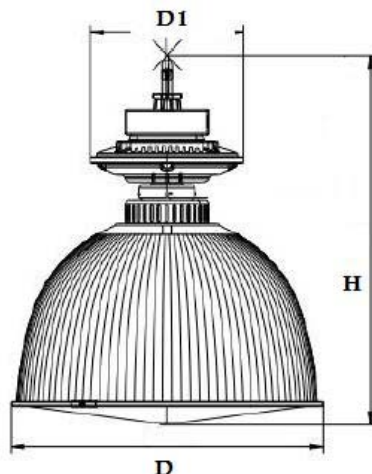

Fixture Dimensions				
Model #	D	D1	H	Note
GGL-70-100PC-18	16.14"	8.07"	23.62	16" hood
GGL-120-150PC-18	22.44"	9.6"	27.24"	22" hood
GGL-200PC-18	22.44"	9.6"	27.24"	22" hood
GGL-250PC-18	22.44"	11.02"	27.72"	22" hood

Fixture Specifications										
#	Fixture Model #	Lamp	Wattage	Voltage	Kelvin	Ambient T. (C)	Install	IP Class	Note	UL
1	GGL-70PC-18	RD70	70W	120-277V	5,000	-20- +40	Hanging conduit/ hook suspended.	IP43 (ballast compartment)	16" Hood	X
2	GGL-80PC-18	RD80	80W							
3	GGL-100PC-18	RD100	100W							
3	GGL-120PC-18	RD120	120W							
4	GGL-150PC-18	RD150	150W							
5	GGL-200PC-18	RD200	200W							
6	GGL-250PC-18	RD250	250W	22" Hood	X					

*Color temperature 2,720-6,500 available upon request