




GGL Lamp Specs

RD Induction Lamp Dimensions



Wattage W	Voltage (VAC)	Current (A)	Frequency	THD	Power Factor	Input Power (W)	Case Temperature °C
70	120-277	0.62-0.27	50/60	≤10%	≥0.95	74	< 65
100		0.88-0.41				105	
150		1.11-0.48				158	
200		1.33-0.63				210	
250		1.76-0.8				263	
300		2.19-1.05				315	

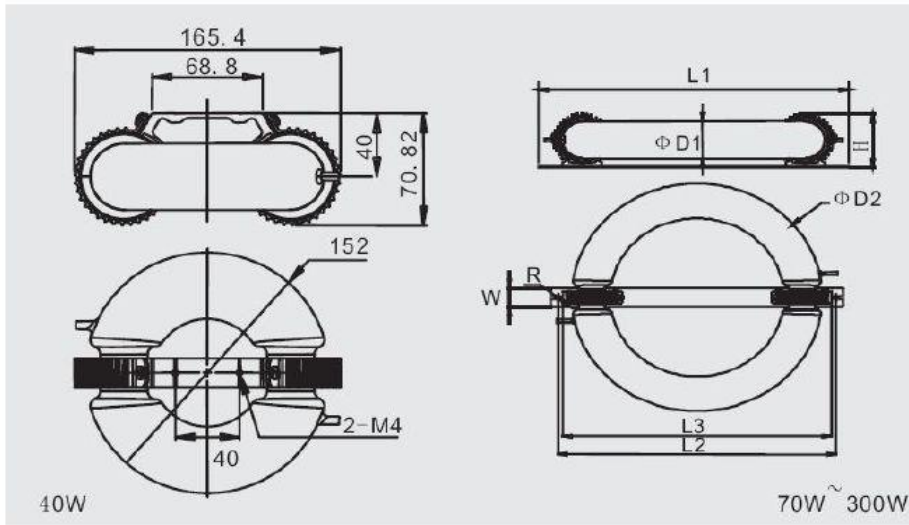

Unit: inch




Wattage	Dim	70W	100w	150w	200w	250w	300w
Bracket Length	L1	9.45	10.63	14.09	16.5	17.17	19.69
Mounting Holes Spacing	L2	8.86	10.04	13.5	15.91	16.38	18.9
Couple Wiring Spacing	L3	7.85	9.42	12.53	14.93	15.83	18.35
Tube Diameter	D1	2.13	2.13	2.13	2.13	2.28	2.28
Lamp height	H	3.09	3.09	3.09	3.09	3.09	3.09
Bracket Width	W	1.18	1.18	1.18	1.18	1.18	1.57
Lamp Width	D2	7.09	8.54	11.57	13.94	14.84	17.36
Mounting Hole Radius	R	0.1	0.1	0.1	0.1	0.1	0.1



www.GetGreenLighting.com
 Induction Lighting Provider
 (614) 556-7118

G G L Ballast Specs

Induction Ballast Dimensions

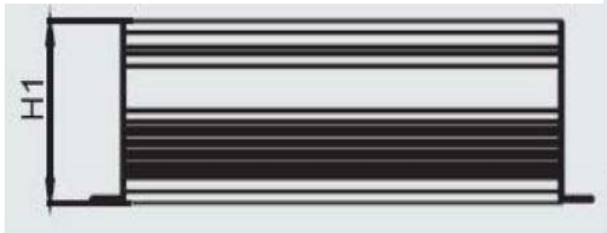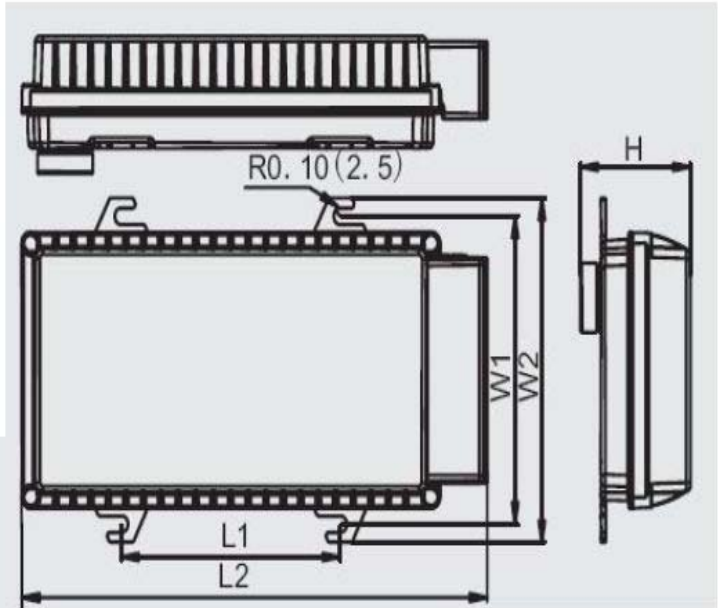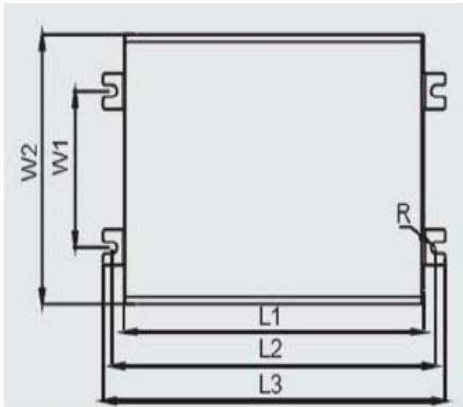

70w-200w Profiled Aluminium Ballast

250w- 300w Die Casting Aluminium Ballast

Wattage	L1	L2	L3	W1	W2	R	H1
70W	6.19	6.63	6.98	2.38	4.11	0.1	1.89
100W	6.19	6.63	6.98	2.38	4.11	0.1	1.89
150W	7.44	7.91	8.39	2.76	4.72	0.1	2.09
200W	7.44	7.91	8.39	2.76	4.72	0.1	2.09
250W	5.91	12.56		6.67	7.46		2.97
300W	5.91	12.56		6.67	7.46		2.97